






REVISIONS	
SYMBOL	DESCRIPTION\DATE
A1	新增P.C.B. 孔尺寸\03/05/09'

REMARK: RoHS COMPLIANT
(符合 RoHS)


FOR CUSTOMER

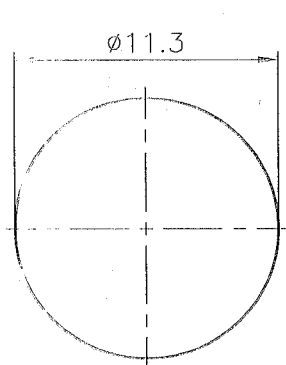





RECOMMENDED
MOUNTING HOLE
(建議架設孔)

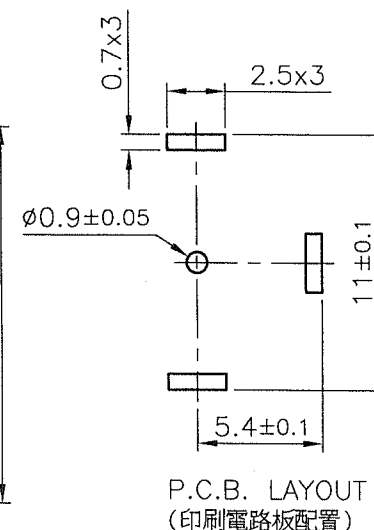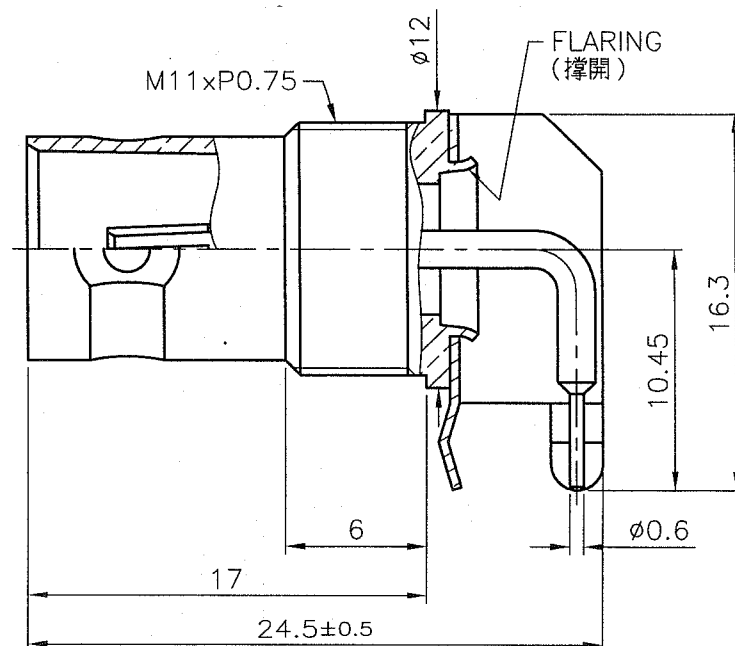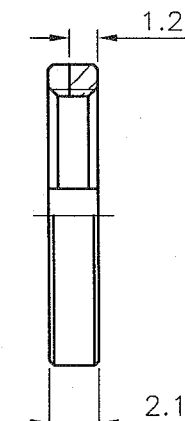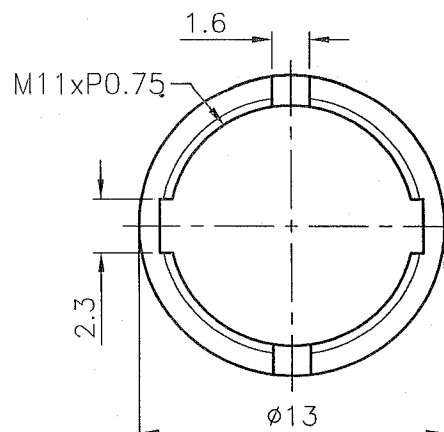

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. BRIGHT TIN PL 100 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. GOLD FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE



1. MAX. PANEL THICKNESS=3mm
(最大板厚)

						DIMENSIONS ARE IN MILLIMETERS				PART NO.		<div></div> <div>帛江科技股份有限公司</div> <div>BO-JIANG TECHNOLOGY CO., LTD.</div> <div>TITLE</div> <div>BNC R/A PCB MOUNT JACK</div> <div>DRAWING NO.</div> <div>7065NR702BF002B</div> <div>FILE NO. Z:\NND\7065\NR\702\002\7065NR702BF000B-A4</div>
	NUT	NOTE 1	NOTE 2			UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°				APPROVED	DATE	
	BRACKET	SS41	NOTE 3								03/05/09'	
	CONTACT PIN	NOTE 1	NOTE 5							CHECKED	DATE	
	LOCK RING	NOTE 1	NOTE 2								03/05/09'	
	INSULATOR	NOTE 4	WHITE							DRAWN	DATE	
	BODY	NOTE 1	NOTE 2								03/05/09'	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A4			