
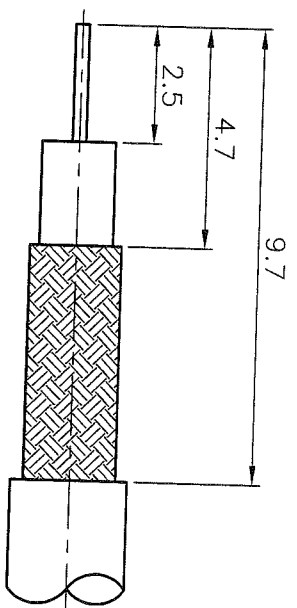
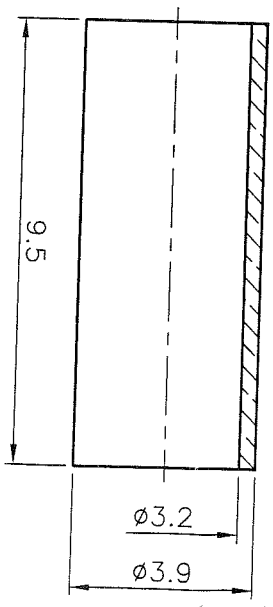
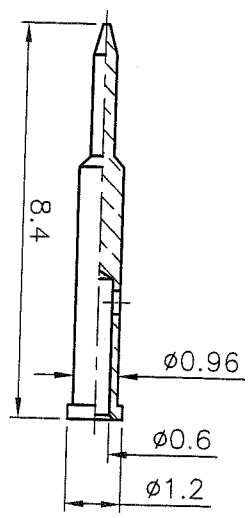


REVISIONS	
ISS SYMBOL	DESCRIPTION \ DATE
A1	#BJ-9651-09BGTG-R轉來 \ 08/02/06'

REMARK: RoHS COMPLIANT
(符合 RoHS)


FOR CUSTOMER

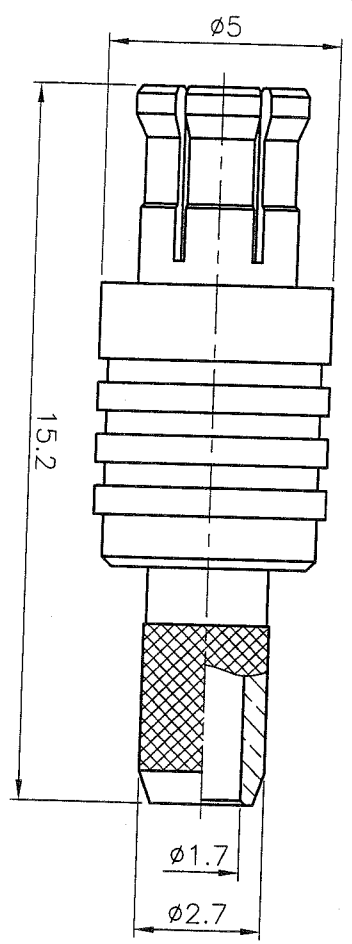

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. BERYLLIUM COPPER PER QQ-C-530
 6. BRASS JIS H 3250, C 2700

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

1. CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
(套管壓管工具)
2. CONTACT PIN TO SOLDER
(中心針銲接)



DIMENSIONS ARE IN MILLIMETERS		PART NO.		DRAWING NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)		APPROVED		DATE	
0.5~6 = ±0.2	>6~30 = ±0.4	CHECKED		DATE	
>30~120 = ±0.6	>120~315 = ±1	DRAWN		DATE	
>315~1000 = ±1.6	ANGLES(角度) = ±5°	DATE		FILE NO.	
SCALE 6/1		ISSUE A1		Z:\NND\9611\NS\509\000\BDB-A1	
FERRULE NOTE 6 NOTE 2		CONTACT PIN NOTE 1 NOTE 3		CONTACT BODY NOTE 5 NOTE 2	
INSULATOR NOTE 4 WHITE		BODY NOTE 1 NOTE 2		DESCRIPTION MATERIAL FINISH Q'TY DRAWING NO.	

3 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.
MCX CRIMP PLUG
(FOR RG-174/U, 188A/U, 316/U)

DRAWING NO. 9611NSS509BDD000B