
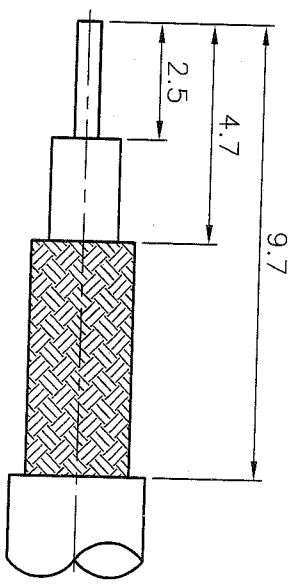
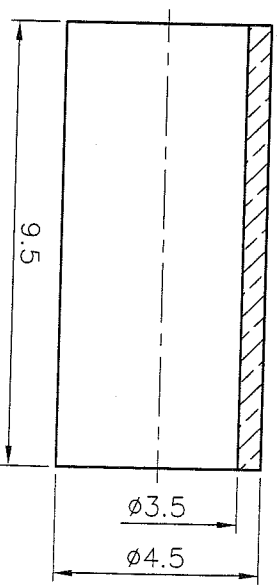
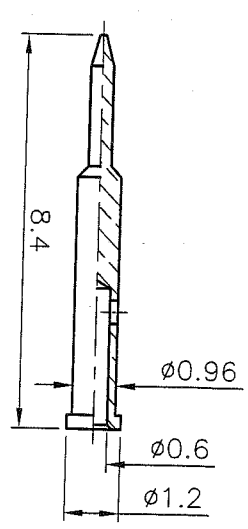


ISS SYMBOL		DESCRIPTION \ DATE
A1		由BJ-9651-10BGTG-R轉來, 更改FERRULE\01/15/08'

REVISIONS

REMARK: ROHS COMPLIANT
(符合 RoHS)


FOR CUSTOMER

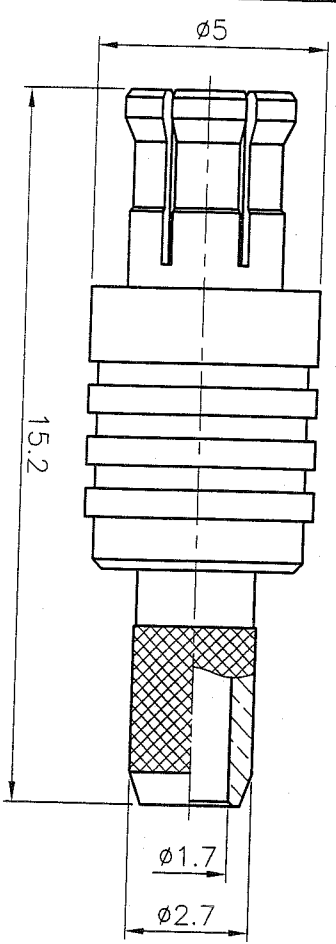

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. BERYLLIUM COPPER PER QQ-C-530
 6. BRASS JIS H 3250, C 2700

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

1. CRIMPED FERRULE
HEX CRIMP SIZE .151" (3.84mm)
(套管壓著工具)
2. CONTACT PIN TO SOLDER
(中心針焊接)



DIMENSIONS ARE IN MILLIMETERS		UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)		PART NO.	
		0.5~6 = ±0.2		APPROVED	
		>6~30 = ±0.4		DATE 01/15/08'	
		>30~120 = ±0.6		CHECKED	
		>120~315 = ±1		DATE 01/15/08'	
		>315~1000 = ±1.6		DRAWN	
		ANGLES(角度) = ±5°		DATE 01/15/08'	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	FERRULE	NOTE 6	NOTE 2		
	CONTACT PIN	NOTE 1	NOTE 3		
	CONTACT BODY	NOTE 5	NOTE 2		
	INSULATOR	NOTE 4	WHITE		
	BODY	NOTE 1	NOTE 2		
<p>3 帛江科技股份有限公司 BO-JIANG TECHNOLOGY CO., LTD. MCX CRIMP PLUG (FOR 316/U DOUBLE BRAID)</p> <p>DRAWING NO. 9611NSS510BD000B</p> <p>FILE NO. Z:\NND\9611\NS\510\000\9611NSS510BD000B-A1</p>					