





REVISONS		
ISS SYMBOL	DESCRIPTION\DATE	
A1	由BJ-9651-28BGTG-R轉來\08/03/06'	

REMARK: RoHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

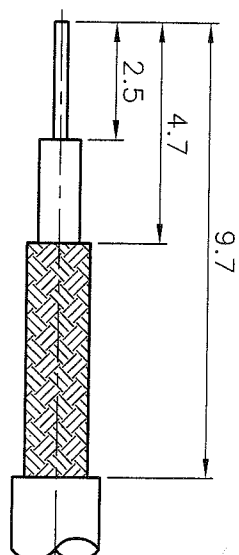


RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

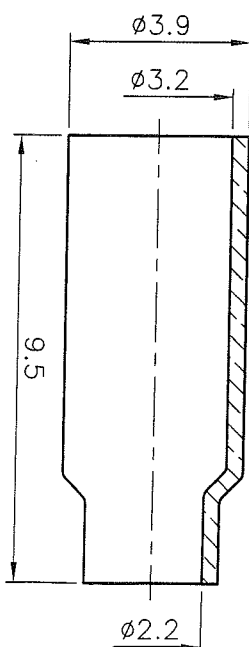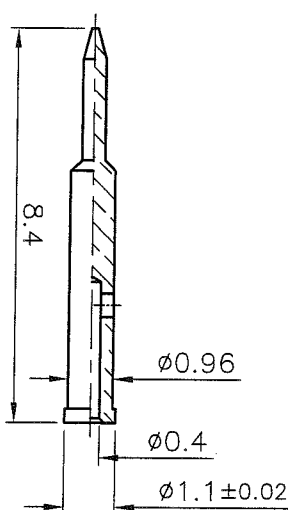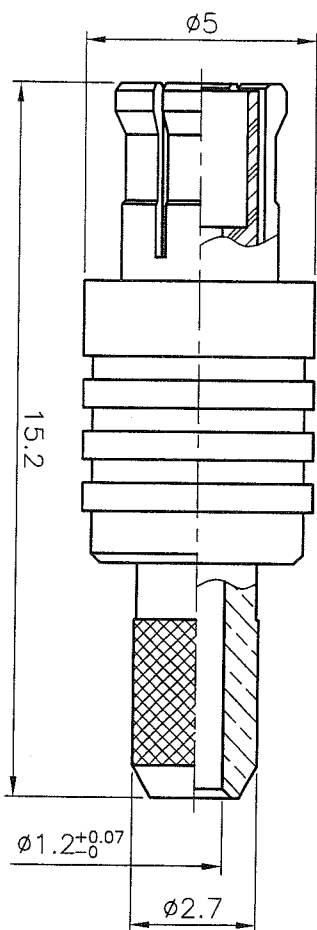

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. TEFLON MIL-P-19468
4. BERYLLIUM COPPER PER QQ-C-530
5. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
6. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
(套管壓著工具)
2. CONTACT PIN TO SOLDER
(中心針焊接)



DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED (一般公差)									
0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°									
PART NO. APPROVED DATE 08/03/06' CHECKED DATE 08/03/06' DRAWN DATE 08/03/06'									
TITLE BO-JIANG 帛江科技股份有限公司 MCX CRIMP PLUG (FOR RG-178B/U,196A/U)									
DRAWING NO. 9611NSS528BD000B									
FILE NO. Z:\NND\9611\NS\528\000\BDB-A1									
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	6/1	ISSUE	A1
	FERRULE	NOTE 6	NOTE 2						
	CONTACT PIN	NOTE 1	NOTE 5						
	CONTACT BODY	NOTE 4	NOTE 2						
	INSULATOR	NOTE 3	WHITE						
	BODY	NOTE 1	NOTE 2						