





REVISED	
ISS SYMBOL	DESCRIPTION\DATE

FOR CUSTOMER

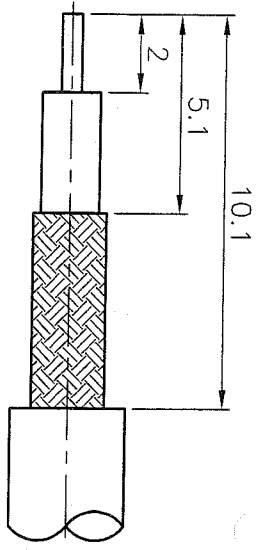

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)


REMARK: RoHS COMPLIANT
(符合 RoHS)

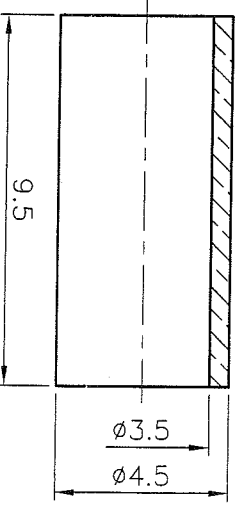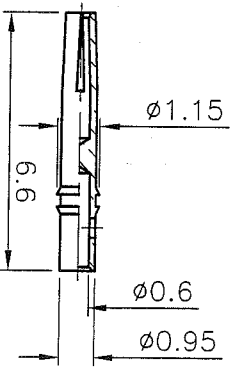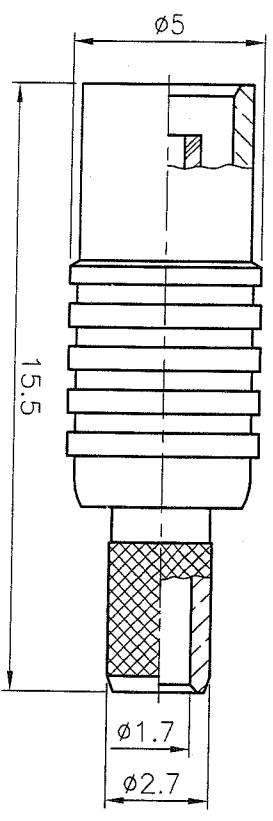

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. TEFLON MIL-P-19468
3. GOLD PL 3 MIN THICK OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. GOLD PL 30 MIN THICK OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
5. BRASS JIS H 3250, C 2700
6. BERYLLIUM COPPER PER QQ-C-530

1. CRIMPED FERRULE
HEX CRIMP SIZE .151" (3.84mm)
(套管壓替工具)
2. CONTACT PIN TO SOLDER
(中心針焊接)



DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
(一般公差)

0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLE(角度) = ±5°

FERRULE	NOTE 5	NOTE 3							
CONTACT PIN	NOTE 6	NOTE 4							
BRAID HOLDER	NOTE 1	NOTE 3							
INSULATOR	NOTE 2	WHITE							
INSULATOR	NOTE 2	WHITE							
BODY	NOTE 1	NOTE 3							
DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A1	

PART NO.

APPROVED DATE 01/15/08

CHECKED DATE 01/15/08

DRAWN DATE 01/15/08

3 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.

TITLE MCMX CRIMP JACK
(FOR 316/U DOUBLE BRAID)

DRAWING NO. 9661NS510BD000B

FILE NO. Z:\NND\9661\NS\510\000\9661NS510BD000B-A1