


REVISIONS




ISS	SYMBOL	DESCRIPTION\DATE
A1		由BJ-9702-09BGTG-R 型號轉來\08/02/06'

MARK: RoHS REQUIREMENT APPLIED  
(符合 RoHS)

FOR CUSTOMER

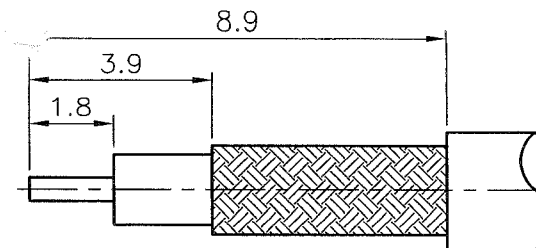


RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

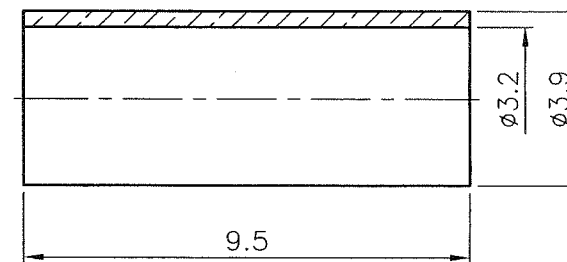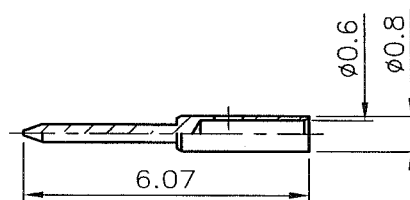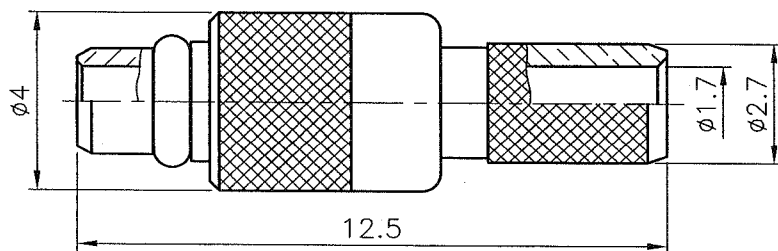

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530
6. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128" (3.25mm)  
(套管壓著工具)
2. CONTACT PIN TO SOLDER  
(中心針銲接)

					DIMENSIONS ARE IN MILLIMETERS				PART NO.		 <b>帛江科技股份有限公司</b> <b>BO-JIANG TECHNOLOGY CO., LTD.</b>
FERRULE	NOTE 6	NOTE 2			UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°	APPROVED	DATE			TITLE	
CONTACT PIN	NOTE 1	NOTE 3				<i>[Signature]</i>	08/02/06'			MMCX CRIMP PLUG (FOR RG-174/U,188A/U,316/U)	
BRAID HOLDER	NOTE 1	NOTE 2				CHECKED	DATE			DRAWING NO.	
INSULATOR	NOTE 4	WHITE				<i>[Signature]</i>	08/02/06'			9711NS509BD000B	
C RING	NOTE 5	NOTE 2				DRAWN	DATE			FILE NO.	
BODY	NOTE 1	NOTE 2				<i>[Signature]</i>	08/02/06'			Z:\NND\9711\NS\509\000\BDB-A1	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	6/1	ISSUE	A1		