




ISS		SYMBOL		DESCRIPTION\DATE	
A1		由BJ-9717-09BGTG001-R型號轉來 03/29/07'			

FOR CUSTOMER

REMARK: RoHS COMPLIANT  
(符合 RoHS)


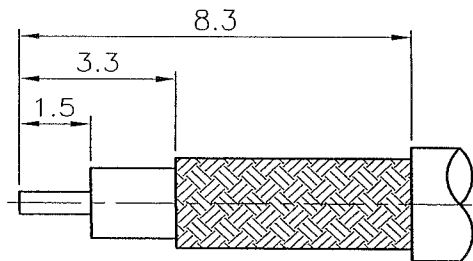


RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

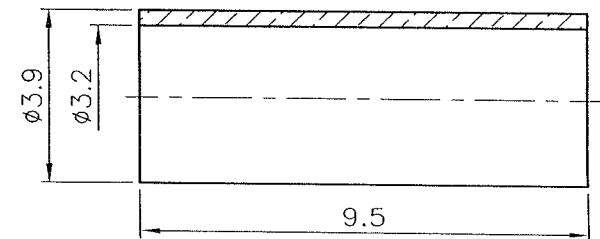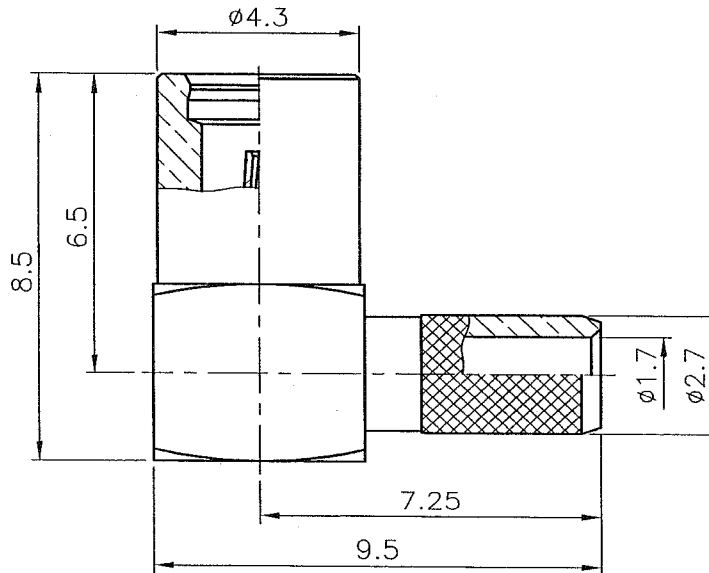

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530
6. BRASS JIS H 3250, C 2700



1. CRIMPED FERRULE  
HEX CRIMP SIZE .128" (3.25mm)  
(套管壓著工具)
2. CONTACT PIN TO SOLDER  
(中心針銲接)

						DIMENSIONS ARE IN MILLIMETERS			PART NO.	
FERRULE	NOTE 6	NOTE 2				UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5'			APPROVED	DATE
COVER	NOTE 1	NOTE 2							<i>[Signature]</i>	03/29/07'
INSULATOR	NOTE 4	WHITE							CHECKED	DATE
CONTACT PIN	NOTE 5	NOTE 3							<i>[Signature]</i>	03/29/07'
INSULATOR	NOTE 4	WHITE							DRAWN	DATE
BODY	NOTE 1	NOTE 2							<i>[Signature]</i>	03/29/07'
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	6/1	ISSUE	A1	

**BO-JIANG** 帛江科技股份有限公司  
BO-JIANG TECHNOLOGY CO., LTD.

TITLE  
MMCX R/A CRIMP JACK  
(FOR RG-174/U,188A/U,316/U)

DRAWING NO.  
9761NR509BD000B

FILE NO. Z:\NND\9761\NR\509\000\9761NR509BD000B-A1