


REVISIONS




ISS	SYMBOL	DESCRIPTION\DATE
A1		由BJ-9708-09BGTG-R型號轉來, 更改 FERRULE 05/24/07'

MARK: RoHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

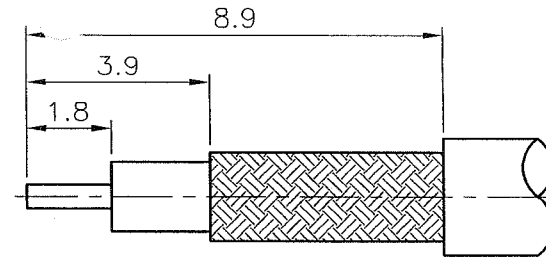

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

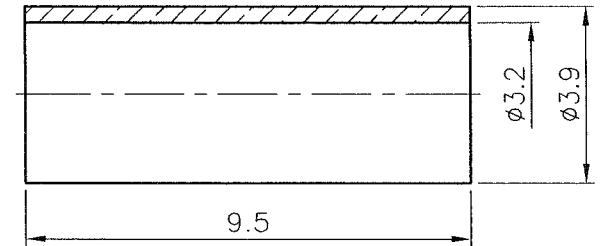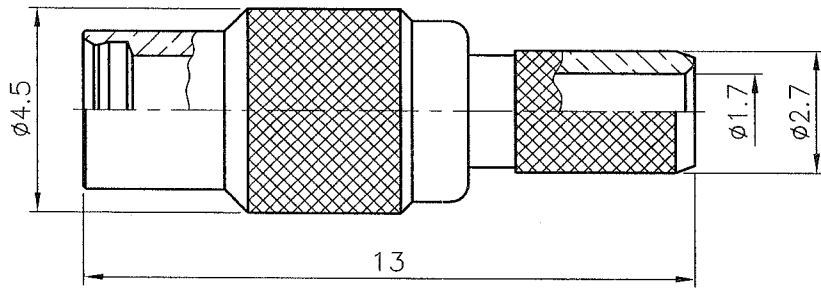

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530
6. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
(套管壓著工具)
2. CONTACT PIN TO SOLDER
(中心針銲接)



					DIMENSIONS ARE IN MILLIMETERS				PART NO.		
FERRULE	NOTE 6	NOTE 2			UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5'				APPROVED	DATE	
CONTACT PIN	NOTE 5	NOTE 3							<i>[Signature]</i>	05/24/07'	
BRAID HOLDER	NOTE 1	NOTE 2							CHECKED	DATE	
INSULATOR	NOTE 4	WHITE							<i>[Signature]</i>	05/24/07'	
BODY	NOTE 1	NOTE 2							DRAWN	DATE	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	6/1	ISSUE	A1	<i>[Signature]</i>	05/24/07'

BO-JIANG 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.

TITLE: MMCX CRIMP JACK
(FOR RG-174/U, 188A/U, 316/U)

DRAWING NO. 9761NS509BD000B

FILE NO. Z:\NND\9761\NS\509\000\9761NS509BD000B-A1