
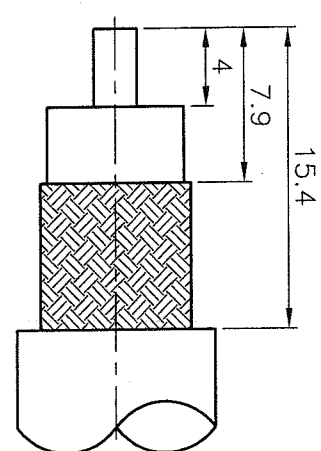
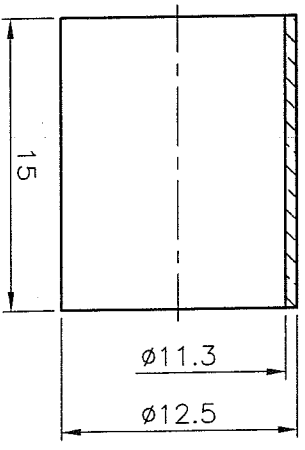
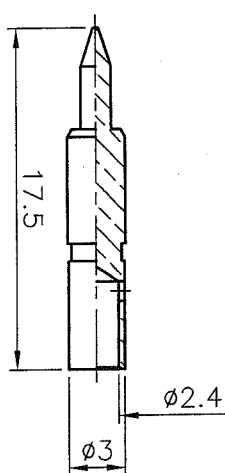


REVISIONS	
ISS SYMBOL	DESCRIPTION \ DATE


REMARK: ROHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

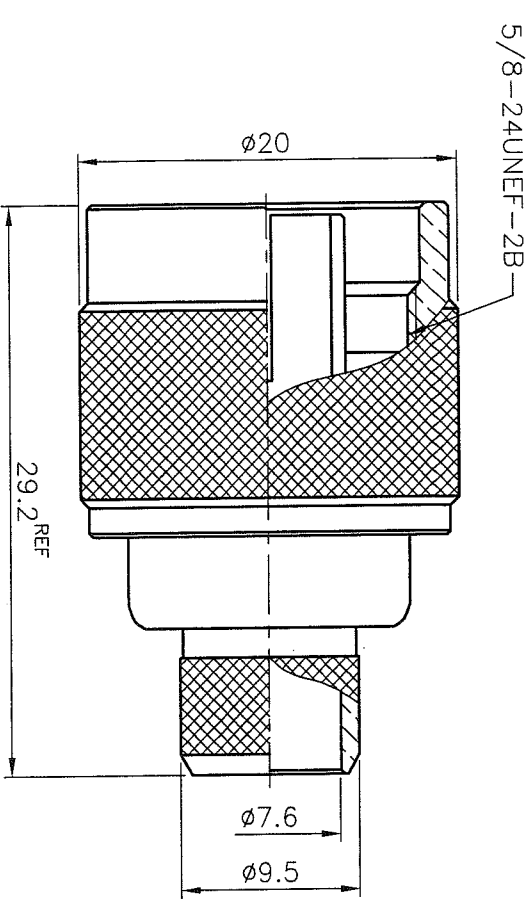

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

1. CRIMPED FERRULE
HEX CRIMP SIZE .429" (10.9mm)
(套管壓著工具)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100" (2.54mm)
(中心針壓著工具)



NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. TEFLON MIL-P-19468
4. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
5. BRASS JIS H 3250, C 2700

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	2.5/1	ISSUE	A1
	FERRULE		NOTE 2						
	CONTACT PIN		NOTE 4						
	SHELL		NOTE 2						
	C RING		NOTE 2						
	GASKET	SILICONE	RED						
	BRAID HOLDER		NOTE 2						
	INSULATOR		NOTE 3						
	CONTACT BODY		NOTE 2						
	BODY		NOTE 2						

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5°

PART NO.	APPROVED	DATE
	CHECKED	DATE
	DRAWN	DATE

BO-JIANG 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.

TITLE: N CRIMP PLUG
(FOR RG-214/J, B8268)

DRAWING NO. 7311NSS514BF000B

FILE NO. Z:\NND\7311\NS\514\000\7311NSS514BF000B-A1