

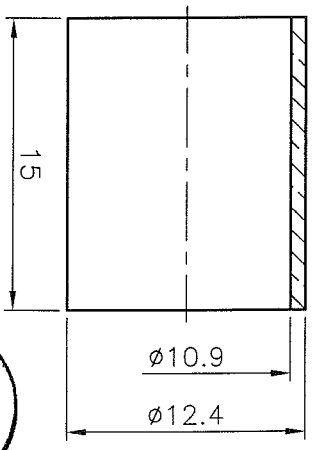
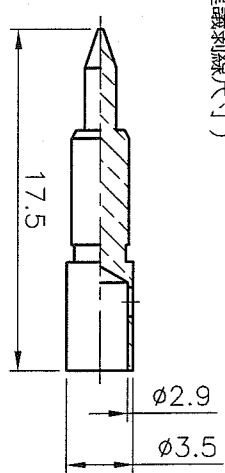
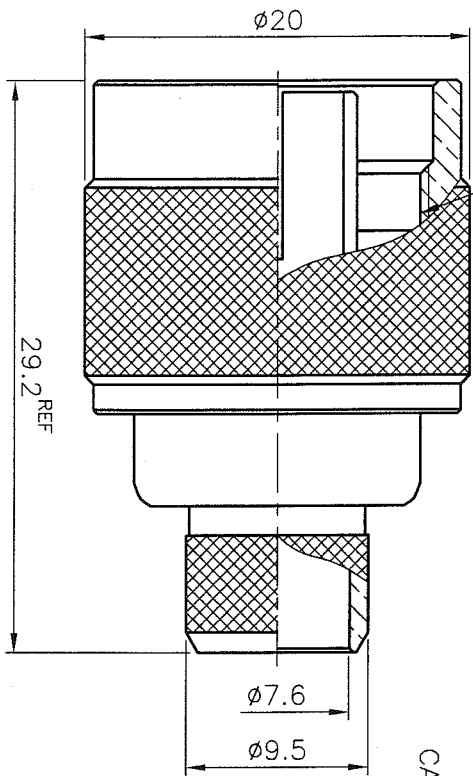


ISS SYMBOL	DESCRIPTION \ DATE
A2	更改 C RING 材質 \ 11/05/08

REVISIONS

REMARK: ROHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

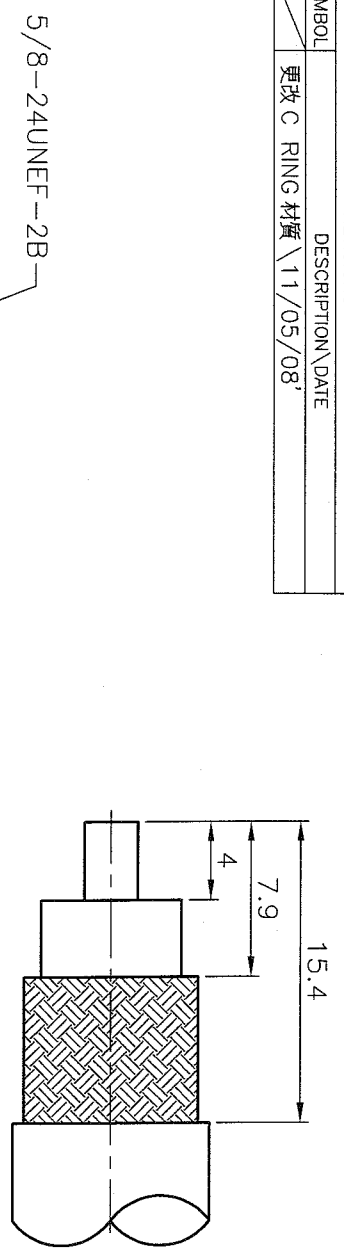

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER 00-B-626
 2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .429" (10.9mm)
(套管壓著工具)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .118" (3mm) OR SOLDER
(中心針壓著工具或焊接)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	FERRULE		NOTE 2		
	CONTACT PIN		NOTE 3		
	SHELL		NOTE 2		
	C RING		NOTE 2		
	GASKET	SILICONE	RED		
	BRAID HOLDER		NOTE 2		
	INSULATOR		NOTE 4		
	CONTACT BODY		NOTE 2		
	BODY		NOTE 2		

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)

0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5°

PART NO.	APPROVED	DATE
	CHECKED	DATE
DRAWN		DATE

3 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.

TITLE: N CRIMP PLUG
(FOR B9913/LMR-400/B7810A/B8214)

DRAWING NO. 7311NS516BF000B

FILE NO. Z:\NND\7311\NS\516\000\7311NS516BF000B-A2