
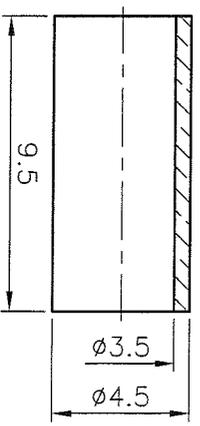
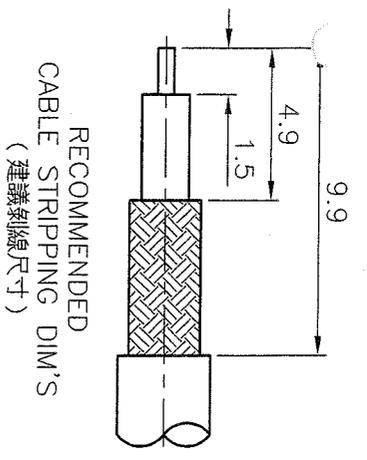



FOR CUSTOMER

REVISIONS	
ISS SYMBOL	DESCRIPTION \ DATE
A1	由BJ-9104-10BGTG-R 型號轉來, 更改FERRULE \ 01/31/08'


REMARK: ROHS COMPLIANT
(符合 RoHS)

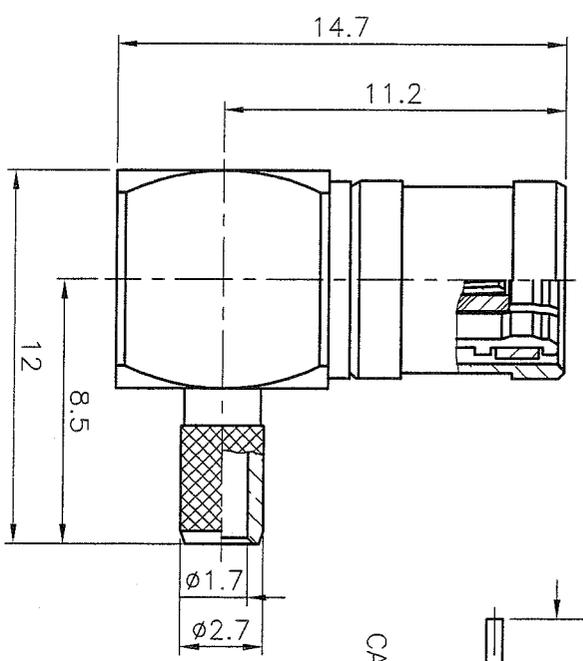

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. BERYLLIUM COPPER PER QQ-C-530
 6. BRASS JIS H 3250, C 2700

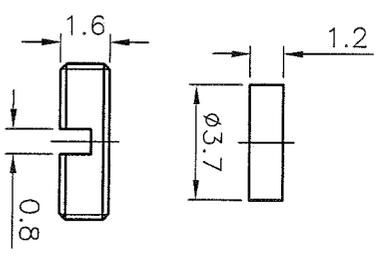

1. CRIMPED FERRULE
HEX CRIMP SIZE .151" (3.84mm)
(套管壓替工具)
2. CONTACT PIN TO SOLDER
(中心針銲接)



NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	NUT	NOTE 1	NOTE 2		
	SPACER	NOTE 4	WHITE		
	FERRULE	NOTE 6	NOTE 2		
	SHELL	NOTE 1	NOTE 2		
	C RING	NOTE 5	NONE		
	CUBE BODY	NOTE 1	NOTE 2		
	CONTACT PIN	NOTE 5	NOTE 3		
	INSULATOR	NOTE 4	WHITE		
	BODY	NOTE 1	NOTE 2		

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)

- 0.5~6 = ± 0.2
- >6~30 = ± 0.4
- >30~120 = ± 0.6
- >120~315 = ± 1
- >315~1000 = ± 1.6
- ANGLES(角度) = $\pm 5'$

SCALE	4/1	ISSUE	A1
-------	-----	-------	----

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

3 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.

TITLE
SMB R/A CRIMP PLUG
(FOR 316/U DOUBLE BRAID)

DRAWING NO. 9111NR510BD000B

FILE NO. Z:\NND\9111\NR\510\000\9111NR510BD000B-A1