

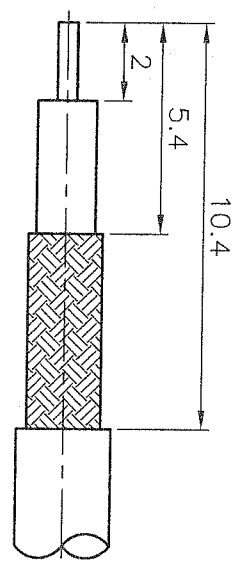
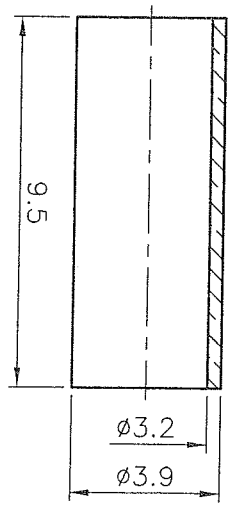


ISS		REVISIONS	
SYMBOL	DESCRIPTION \ DATE		
A1	由BJ-9101-09BGTG-R轉來 \ 03/14/07'		
A2	增加 CONTACT PIN 樹孔 \ 02/12/08'		
A3	更換 FERRULE \ 10/28/09'		

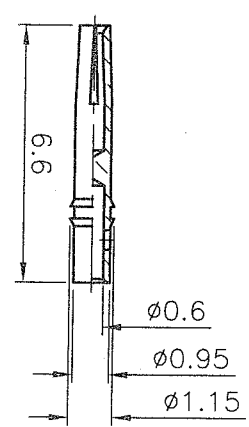


RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

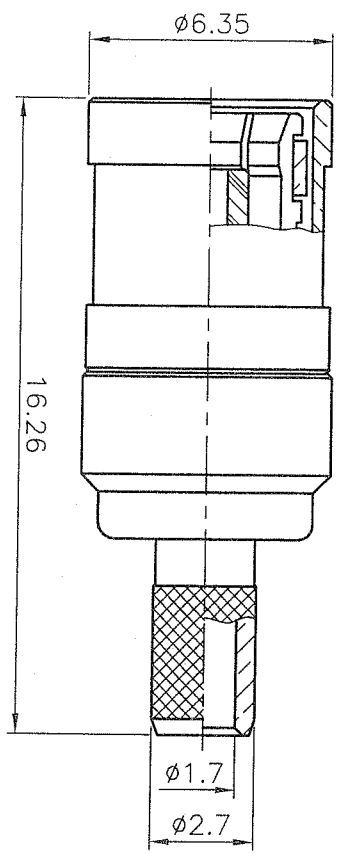

REMARK: RoHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL 3 MIN THICK OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 30 MIN THICK OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. COPPER JIS H 3500, C 1220
 6. BERYLLIUM COPPER PER QQ-C-530



1. CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
(套管壓著工具)
2. CONTACT PIN TO SOLDER
(中心針焊接)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A3
	FERRULE	NOTE 5	NOTE 2						
	CONTACT PIN	NOTE 6	NOTE 3						
	SHELL	NOTE 1	NOTE 2						
	C RING	NOTE 6	NONE						
	BRAID HOLDER	NOTE 1	NOTE 2						
	INSULATOR	NOTE 4	WHITE						
	INSULATOR	NOTE 4	WHITE						
	BODY	NOTE 1	NOTE 2						

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5'

PART NO.		APPROVED		CHECKED		DRAWN	
		DATE		DATE		DATE	
		10/28/09'		10/28/09'		10/28/09'	

BO-JIANG 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.

TITLE: SMB CRIMP PLUG
(FOR RG-174/U, 188A/U, 316/U)

DRAWING NO. 9111NS509BD000B

FILE NO. Z:\NND\9111\NS\509\000\9111NS509BD000B-A3