


ISS SYMBOL		DESCRIPTION \ DATE
A1		由BJ-9101-28BGTG-R轉來\08/03/06'
A2		更改CONTACT PIN, FERRULE\01/22/08'
A3		加註部份公差\01/25/08'
A4		CONTACT PIN 加上鉗孔\01/12/10'





REVISIONS

REMARK: ROHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

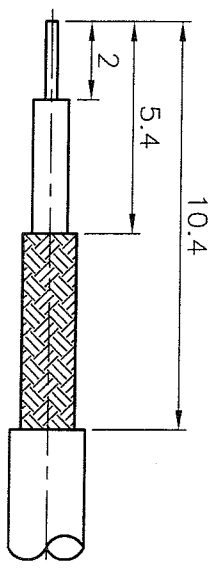

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

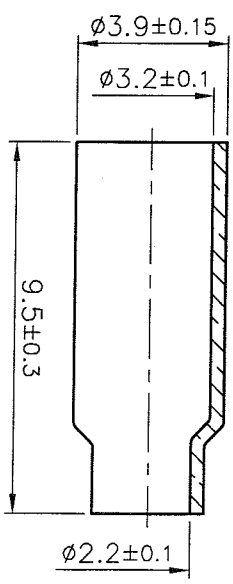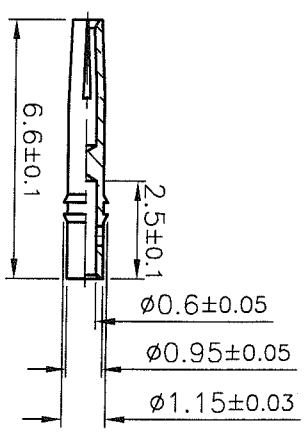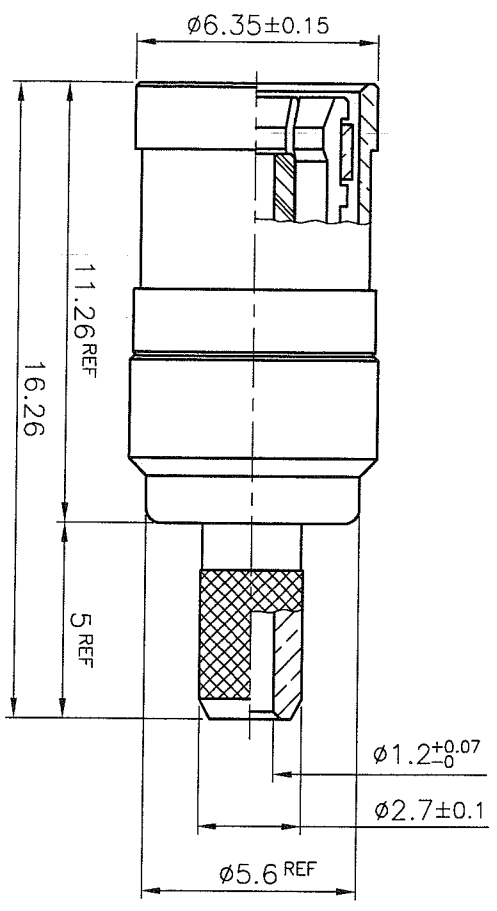

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - GOLD PL 3 MIN THICK OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 - GOLD PL 30 MIN THICK OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468
 - BRASS JIS H 3250, C 2700
 - BERYLLIUM COPPER PER QQ-C-530

- CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
(套管壓著工具)
- CONTACT PIN TO SOLDER
(中心針焊接)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	FERRULE		NOTE 5	NOTE 2	
	CONTACT PIN		NOTE 6	NOTE 3	
	SHELL		NOTE 1	NOTE 2	
	C RING		NOTE 6	NONE	
	BRAID HOLDER		NOTE 1	NOTE 2	
	INSULATOR		NOTE 4	WHITE	
	INSULATOR		NOTE 4	WHITE	
	BODY		NOTE 1	NOTE 2	

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
(一般公差)

TOLERANCES

- 0.5~6 = ±0.2
- >6~30 = ±0.4
- >30~120 = ±0.6
- >120~315 = ±1
- >315~1000 = ±1.6
- ANGLES(角度) = ±5°

PART NO.

APPROVED

CHECKED

DRAWN

DATE

DATE

DATE

BO-JIANG 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.

SMB CRIMP PLUG
(FOR RG-178B/U, 196A/U)

DRAWING NO. 9111NNS528BD000B

FILE NO. Z:\NND\9111\NS\528\000\9111NNS528BD000B-A4