

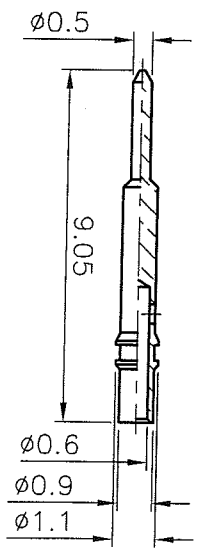
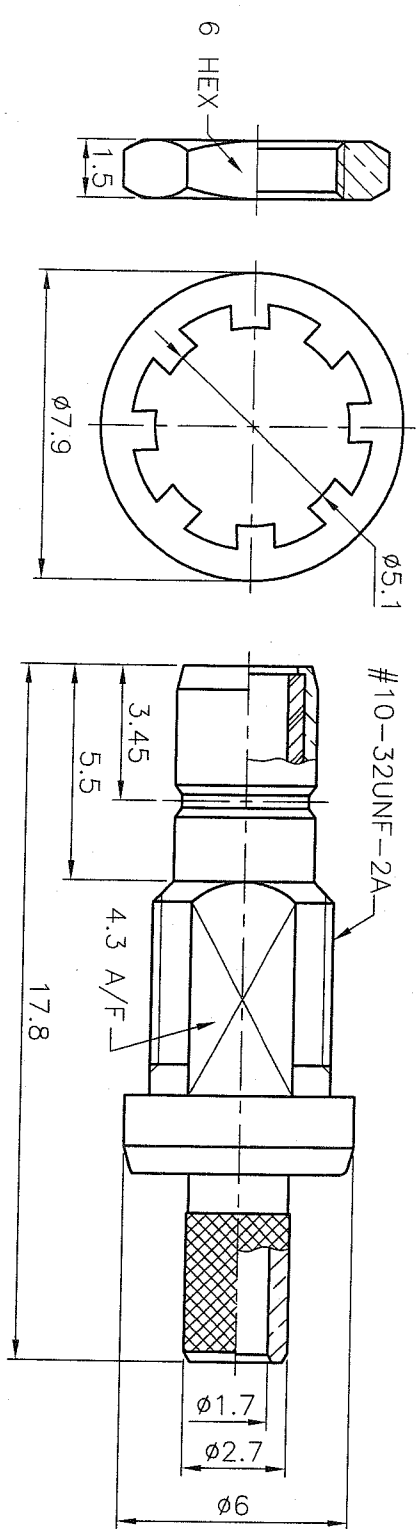



FOR CUSTOMER

ISS SYMBOL	DESCRIPTION \ DATE
A1	由BU-9103-09BGTG-R轉來\04/02/07'
A2	訂正 GASKET, NUT 材質\11/11/08'


REVISIONS

REMARK: RoHS COMPLIANT  
(符合 RoHS)

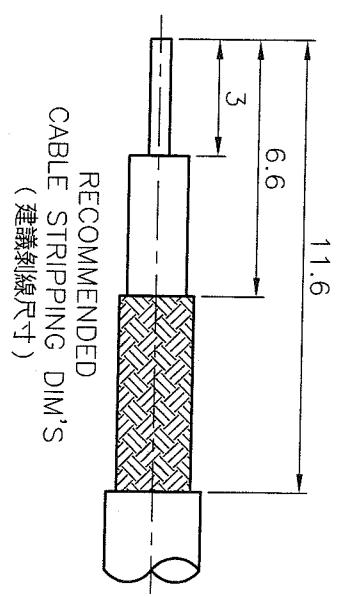

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  4. TEFLON MIL-P-19468
  5. BRASS PER QQ-B-613
  6. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128" (3.25mm)  
(套管壓著工具)
2. CONTACT PIN TO SOLDER  
(中心針焊接)
3. MAX. PANEL THICKNESS=3mm  
(最大板厚)

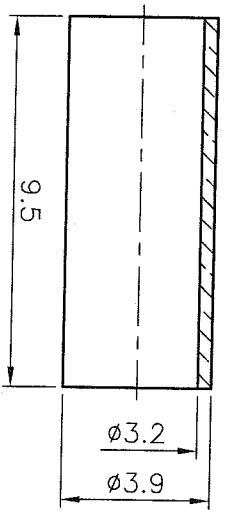

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A2
	FERRULE	NOTE 6	NOTE 2						
	NUT	NOTE 1	NOTE 2						
	WASHER	NOTE 5	NOTE 2						
	CONTACT PIN	NOTE 1	NOTE 3						
	BRAID HOLDER	NOTE 1	NOTE 2						
	INSULATOR	NOTE 4	WHITE						
	INSULATOR	NOTE 4	WHITE						
	BODY	NOTE 1	NOTE 2						

DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES  
(一般公差)

0.5~6 = ±0.2  
>6~30 = ±0.4  
>30~120 = ±0.6  
>120~315 = ±1  
>315~1000 = ±1.6  
ANGLES(角度) = ±5'

PART NO.

APPROVED  
DATE 11/11/08'

CHECKED  
DATE 11/11/08'

DRAWN  
DATE 11/11/08'

**BO-JIANG** 帛江科技股份有限公司

BO-JIANG TECHNOLOGY CO., LTD.

SMB BULKHEAD CRIMP JACK  
(FOR RG-174/U, 188A/U, 316/U)

DRAWING NO. 9161BS509BD000B  
FILE NO. Z:\NND\9161\BS\509\000\9161BS509BD000B-A2