REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE

FOR CUSTOMER

R. ARK: RoHS COMPLIANT
(符合 RoHS)

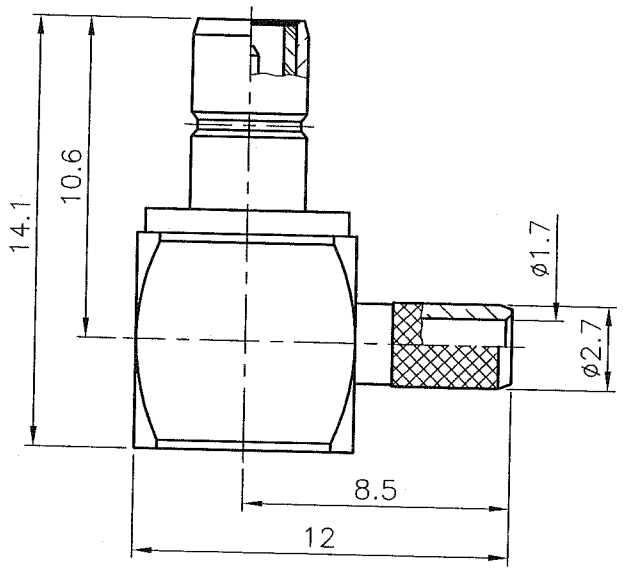

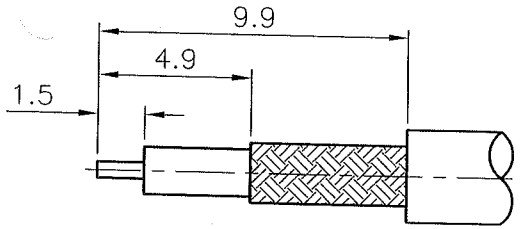

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

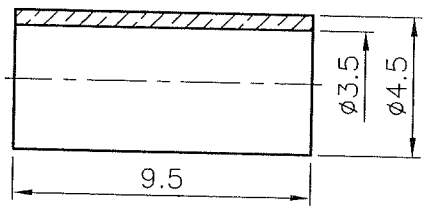





NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BRASS JIS H 3250, C 2700

ISSUE
2008. 1. 08
R&D

1. CRIMPED FERRULE
HEX CRIMP SIZE .151" (3.84mm)
(套管壓著工具)
2. CONTACT PIN TO SOLDER
(中心針銲接)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	COVER	NOTE 1	NOTE 2		
	SPACER	NOTE 4	WHITE		
	FERRULE	NOTE 5	NOTE 2		
	CONTACT PIN	NOTE 1	NOTE 3		
	INSULATOR	NOTE 4	WHITE		
	CUBE BODY	NOTE 1	NOTE 2		
	BODY	NOTE 1	NOTE 2		

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
(一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5°

SCALE 4/1 | ISSUE A1

PART NO.

APPROVED DATE 01/08/08'

CHECKED DATE 01/08/08'

DRAWN DATE 01/08/08'

BO-JIANG 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.

TITLE
SMB R/A CRIMP JACK
(FOR 316/U DOUBLE BRAID)

DRAWING NO. 9161NR510BD000B

FILE NO. Z:\NND\9161\NR\510\000\9161NR510BD000B-A1