






ISS SYMBOL		REVISIONS
A1	由BJ-3102-28BGTG-R轉來	DESCRIPTION\DATE 08/04/06'

FOR CUSTOMER

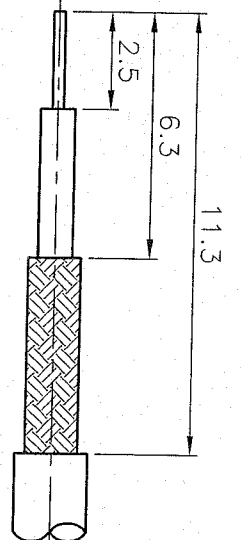

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)

REMARK: RoHS COMPLIANT  
(符合RoHS)

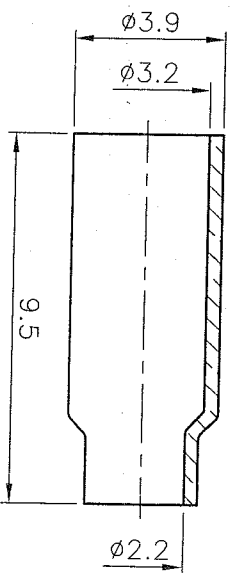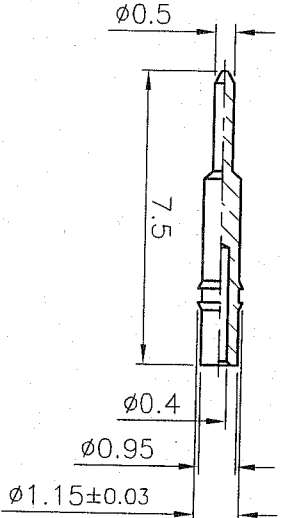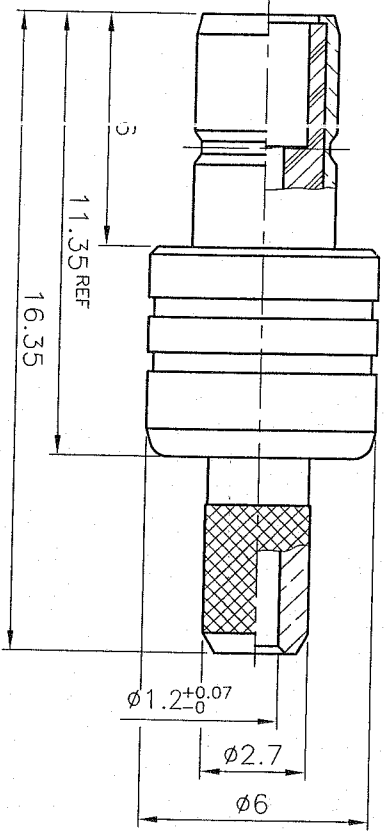

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER 00-B-626
  2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  4. TEFLON MIL-P-19468
  5. BRASS: JIS H 3250, C 2700

1. CRIMPED FERRULE  
HEX CRIMP SIZE .128" (3.25mm)  
(套管壓管工具)
2. CONTACT PIN TO SOLDER  
(中心針焊接)

DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED (一般公差)		PART NO.		APPROVED		DATE		DRAWING NO.		TITLE	
0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5'		B0-JIANG		[Signature]		08/04/06'		9161NSS528BD000B		SMB CRIMP JACK (FOR RG-178B/U, 196A/U)	
FERRULE NOTE 5 NOTE 2		CONTACT PIN NOTE 1 NOTE 3		INSULATOR NOTE 4 WHITE		BRAID HOLDER NOTE 1 NOTE 2		INSULATOR NOTE 4 WHITE		BODY NOTE 1 NOTE 2	
DESCRIPTION		MATERIAL		FINISH		Q'TY		DRAWING NO.		SCALE	
										5/1 ISSUE A1	
DRAWING NO.		SCALE		5/1		ISSUE		A1		DRAWN	
DATE		DATE		DATE		DATE		DATE		DATE	
08/04/06'		08/04/06'		08/04/06'		08/04/06'		08/04/06'		08/04/06'	
FILE NO.		Z:\NND\9161\NS\528\000\BDB-A1		DRAWING NO.		9161NSS528BD000B		DRAWING NO.		9161NSS528BD000B	
DRAWING NO.		9161NSS528BD000B		DRAWING NO.		9161NSS528BD000B		DRAWING NO.		9161NSS528BD000B	

**3** 帛江科技股份有限公司  
B0-JIANG TECHNOLOGY CO., LTD.