
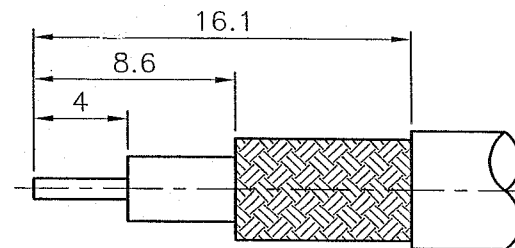


REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE
A1		由BJ-7401-01BNTG-R 型號轉來\06/05/07'



RE MARK: RoHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

7/16-28UNEF-2B

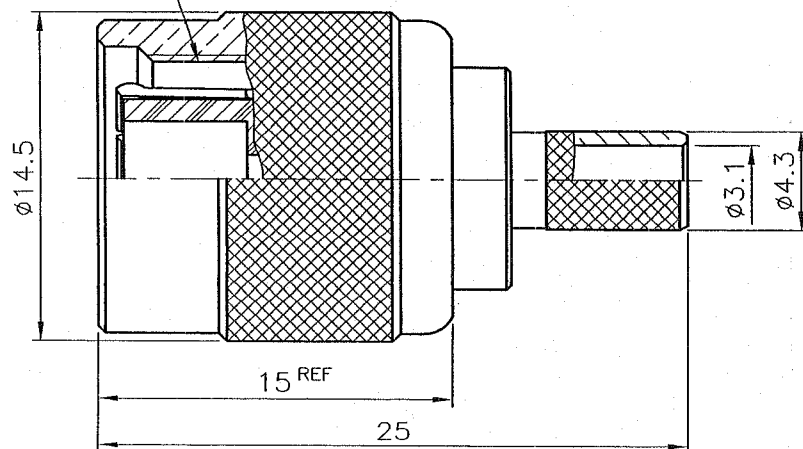

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

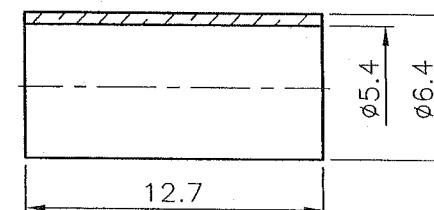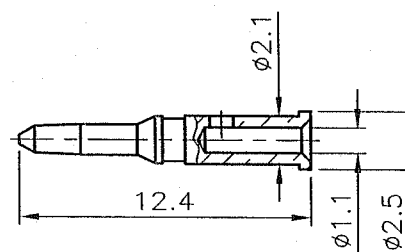

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BRASS JIS H 3250, C 2700



1. CRIMPED FERRULE
HEX CRIMP SIZE .213" (5.41mm)
(套管壓著工具)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" (1.72mm)
(中心針壓著工具)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A1	PART NO.	TITLE
	FERRULE	NOTE 5	NOTE 2								
	CONTACT PIN	NOTE 1	NOTE 3								
	SHELL	NOTE 1	NOTE 2								
	GASKET	SILICONE	RED								
	C RING	SS41	NOTE 2								
	WASHER	DELRI	NATURAL								
	WASHER	SS41	NOTE 2								
	INSULATOR	NOTE 4	WHITE								
	BODY	NOTE 1	NOTE 2								
DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°										APPROVED	DATE
										CHECKED	DATE
										DRAWN	DATE
										BO-JIANG BO-JIANG TECHNOLOGY CO., LTD. TNC CRIMP PLUG (FOR RG-58C/U, 58/U)	
										DRAWING NO. 7411NS501BF000B	
										FILE NO. Z:\NND\7411\NS\501\000\7411NS501BF000B-A1	