
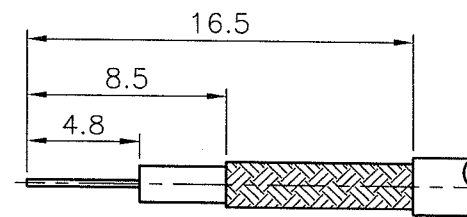






REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE
A1		由BJ-7401-09BNTG 型號轉來\10/03/08'

REMARK: RoHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

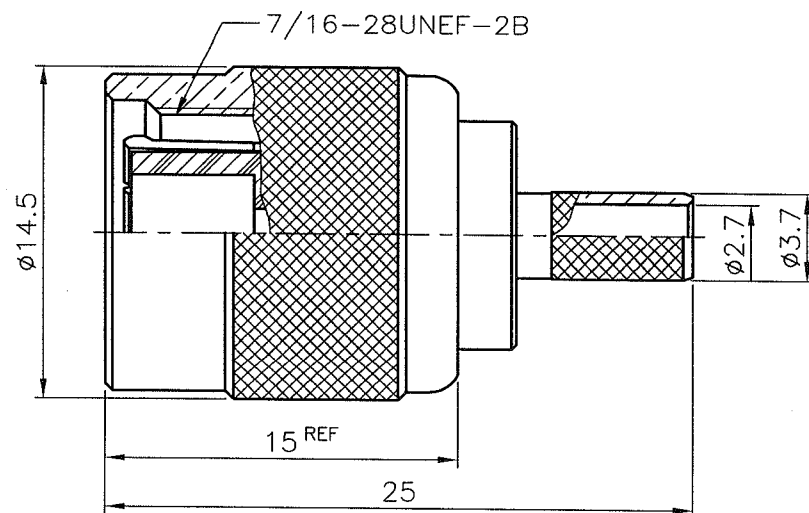


RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

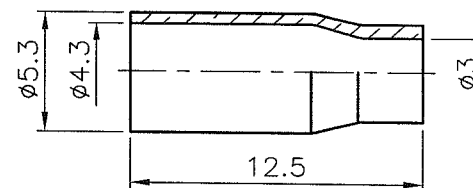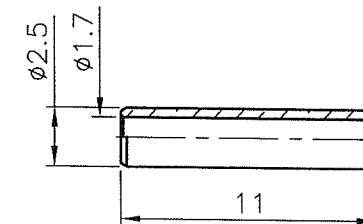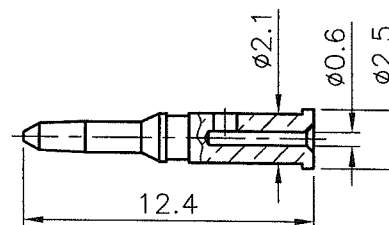

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BRASS JIS H 3250, C 2700



1. CRIMPED FERRULE
HEX CRIMP SIZE .178" (4.52mm)
(套管壓著工具)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" (1.72mm)
(中心針壓著工具)

FERRULE	NOTE 5	NOTE 2		
SPACER	NOTE 1	NOTE 2		
INSULATOR	NOTE 4	WHITE		
CONTACT PIN	NOTE 1	NOTE 3		
SHELL	NOTE 1	NOTE 2		
GASKET	SILICONE	RED		
C RING	SS41	NOTE 2		
WASHER	DELRIN	NATURAL		
WASHER	SS41	NOTE 2		
INSULATOR	NOTE 4	WHITE		
BODY	NOTE 1	NOTE 2		
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5°

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

BO-JIANG		BO-JIANG TECHNOLOGY CO., LTD.
TITLE		TNC CRIMP PLUG (FOR RG-174/U,188A/U,316/U)
DRAWING NO.		7411NS509BF003B
FILE NO.		Z:\NND\7411\NS\509\003\7411NS509BF003B-A1