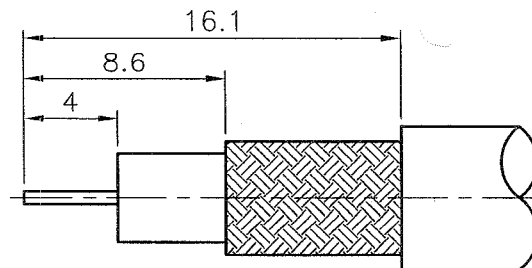
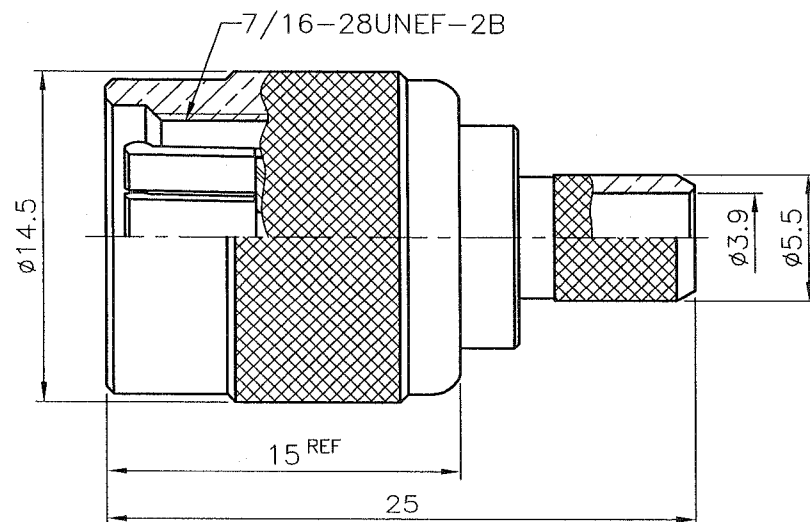
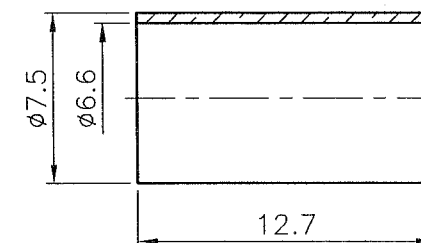
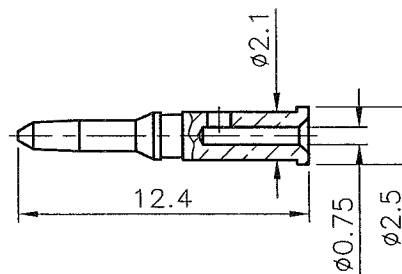


REVISIONS

ISS	SYMBOL	DESCRIPTION\DATE

FOR CUSTOMER

REMARK: RoHS COMPLIANT
(符合 RoHS)RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. BRASS JIS H 3250, C 2700
5. TEFLON MIL-P-19468

1. CRIMPED FERRULE
HEX CRIMP SIZE .255" (6.48mm)
(套管壓著工具)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" (1.72mm)
(中心針壓著工具)



	FERRULE	NOTE 4	NOTE 2		
	CONTACT PIN	NOTE 1	NOTE 3		
	SHELL	NOTE 1	NOTE 2		
	GASKET	SILICONE	RED		
	C RING	SS41	NOTE 2		
	WASHER	DELIN	NATURAL		
	WASHER	SS41	NOTE 2		
	INSULATOR	NOTE 5	WHITE		
	BODY	NOTE 1	NOTE 2		
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)

0.5~6 = ±0.2
 >6~30 = ±0.4
 >30~120 = ±0.6
 >120~315 = ±1
 >315~1000 = ±1.6
 ANGLES(角度) = ±5°

PART NO.

APPROVED DATE 06/05/07'

CHECKED DATE 06/05/07'

DRAWN DATE 06/05/07'

BO-JIANG 帛江科技股份有限公司
 BO-JIANG TECHNOLOGY CO., LTD.

TITLE
TNC CRIMP PLUG (75 ohms)
(FOR RG-59/U)

DRAWING NO. 7411NS705BF000B

FILE NO. Z:\NND\7411\NS\705\000\7411NS705BF000B-A1