


REVISIONS


ISS	SYMBOL	DESCRIPTION\DATE
A1		由BJ-7417-01BNTG-R 型號轉來\04/24/07'

FOR CUSTOMER




REMARK: RoHS COMPLIANT
(符合 RoHS)






RECOMMENDED
MOUNTING HOLE
(建議架設孔)



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

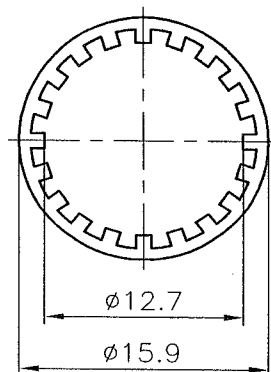


1/2-28UNEF
7/16-28UNEF-2A

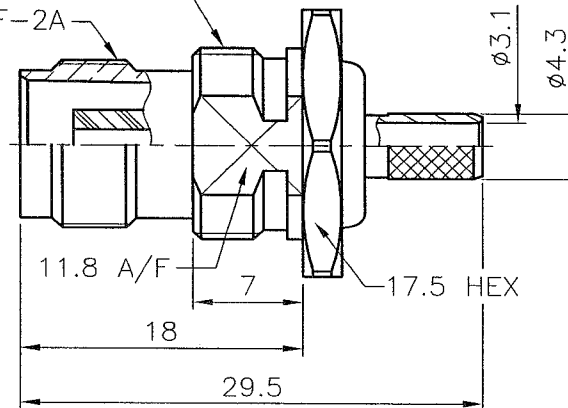

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. TEFLON MIL-P-19468
4. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
5. PHOSPHOR BRONZE PER QQ-B-750
6. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .213" (5.41mm)
(套管壓著工具)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" (1.72mm)
(中心針壓著工具)
3. MAX. PANEL THICKNESS=3.5mm
(最大板厚)



NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	NUT	NOTE 1	NOTE 2		
	WASHER	SS41	NOTE 2		
	GASKET	RUBBER	ORANGE		
	FERRULE	NOTE 6	NOTE 2		
	CONTACT PIN	NOTE 5	NOTE 4		
	BRAID HOLDER	NOTE 1	NOTE 2		
	INSULATOR	NOTE 3	WHITE		
	BODY	NOTE 1	NOTE 2		

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)

- 0.5~6 = ±0.2
- >6~30 = ±0.4
- >30~120 = ±0.6
- >120~315 = ±1
- >315~1000 = ±1.6
- ANGLES(角度) = ±5'

PART NO.

APPROVED *[Signature]* DATE 04/24/07'

CHECKED *[Signature]* DATE 04/24/07'

DRAWN *[Signature]* DATE 04/24/07'

BO-JIANG 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.

TITLE TNC BULKHEAD CRIMP JACK
(FOR RG-58C/U, 58/U)

DRAWING NO. 7461DS501BF000B

FILE NO. Z:\NND\7461\DS\501\000\7461DS501BF000B-A1