REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE

FOR CUSTOMER



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



RECOMMENDED
MOUNTING HOLE
(建議架設孔)

REMARK: RoHS COMPLIANT
(符合 RoHS)

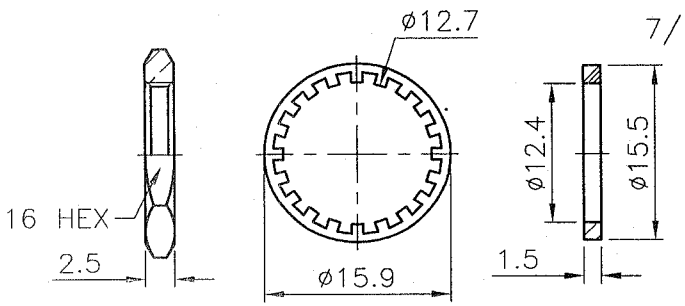

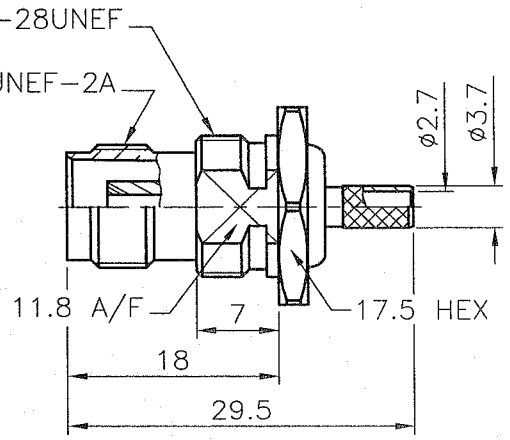

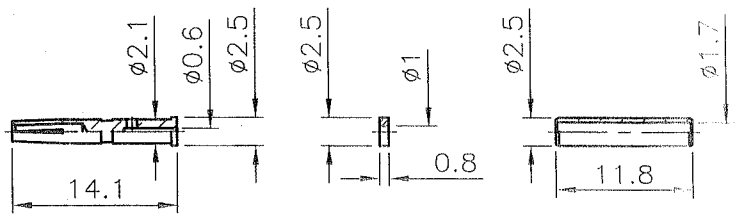

ISSUE
2009. 3. 20
R&D

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. PHOSPHOR BRONZE PER QQ-B-750
6. BRASS JIS H 3250, C 2700



1. CRIMPED FERRULE
HEX CRIMP SIZE .178" (4.52mm)
(套管壓著工具)
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" (1.72mm)
(中心針壓著工具)
3. MAX. PANEL THICKNESS=3.5mm
(最大板厚)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	NUT	NOTE 1	NOTE 2		
	WASHER	SS41	NOTE 2		
	GASKET	RUBBER	ORANGE		
	FERRULE	NOTE 6	NOTE 2		
	SPACER	NOTE 1	NOTE 2		
	SPACER	NOTE 4	WHITE		
	CONTACT PIN	NOTE 5	NOTE 3		
	BRAID HOLDER	NOTE 1	NOTE 2		
	INSULATOR	NOTE 4	WHITE		
	BODY	NOTE 1	NOTE 2		

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
(一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5°

SCALE 1.5/1 ISSUE A1

PART NO.

APPROVED DATE 03/20/09'
CHECKED DATE 03/20/09'
DRAWN DATE 03/20/09'

BO-JIANG 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD

TITLE
TNC BULKHEAD CRIMP JACK
(FOR RG-174/U,188A/U,316/U)

DRAWING NO. 7461DS509BF000B

FILE NO. Z:\NND\7461\DS\509\000\7461DS509BF000B-A1