



REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE
A1		由BJ-7417-34BNTG003-R 型號轉來\08/31/07'

FOR CUSTOMER



RECOMMENDED
MOUNTING HOLE
(建議架設孔)

SOLDERING
(銲接)






SOLDERING
(銲接)



CRIMPING
(壓著)

USER GUIDE
(使用指導)

REMARK: RoHS COMPLIANT
(符合 RoHS)




1/2-28UNEF
7/16-28UNEF-2A

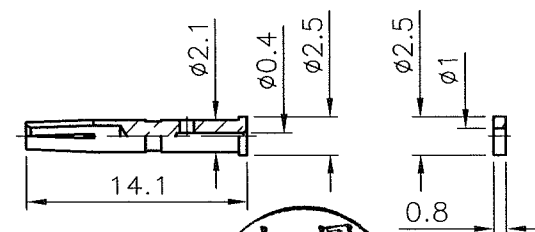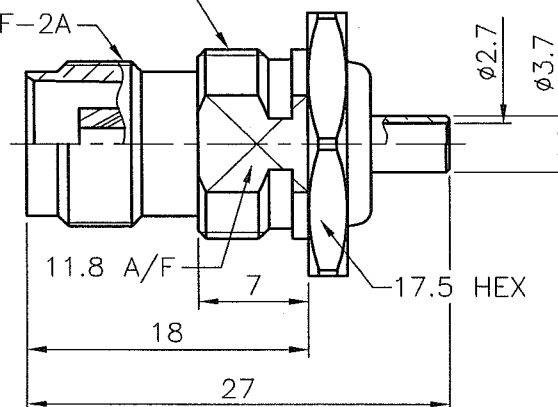


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. TEFLON MIL-P-19468
4. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
5. PHOSPHOR BRONZE PER QQ-B-750



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



1. CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
(套管壓著工具)
2. CONTACT PIN TO SOLDER
(中心針銲接)
3. MAX. PANEL THICKNESS=3.5mm
(最大板厚)
4. VSWR 1.5 MAX. UP TO 6GHz
(頻率 6GHz 之內,電壓駐波比須低於 1.5)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	NUT	NOTE 1	NOTE 2		
	WASHER	SS41	NOTE 2		
	GASKET	RUBBER	ORANGE		
	SPACER	NOTE 1	NOTE 2		
	SPACER	NOTE 3	WHITE		
	CONTACT PIN	NOTE 5	NOTE 4		
	BRAID HOLDER	NOTE 1	NOTE 2		
	INSULATOR	NOTE 3	WHITE		
	BODY	NOTE 1	NOTE 2		

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5'

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

BO-JIANG BO-JIANG TECHNOLOGY CO., LTD.	
TITLE	TNC BULKHEAD CRIMP JACK (FOR 1.13mm,1.32mm)
DRAWING NO.	7461DS534BF002B
FILE NO.	Z:\NND\7461\DS\534\002\7461DS534BF002B-A1