
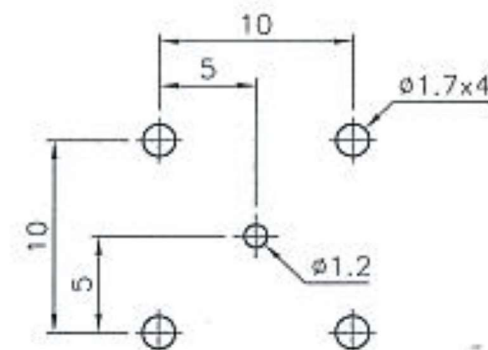
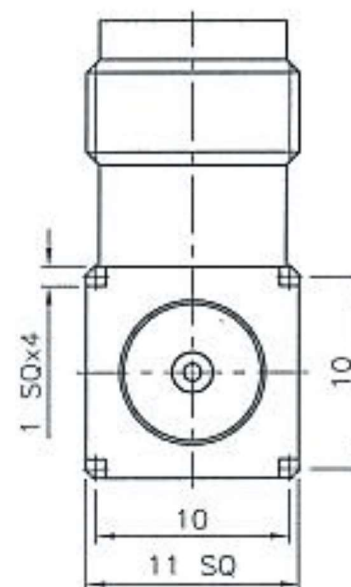


REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE
A1		由BJ-7459-83BNTG002-R型變換來\05/23/07
A2	△	新增 NOTE 6\12/16/11

FOR CUSTOMER

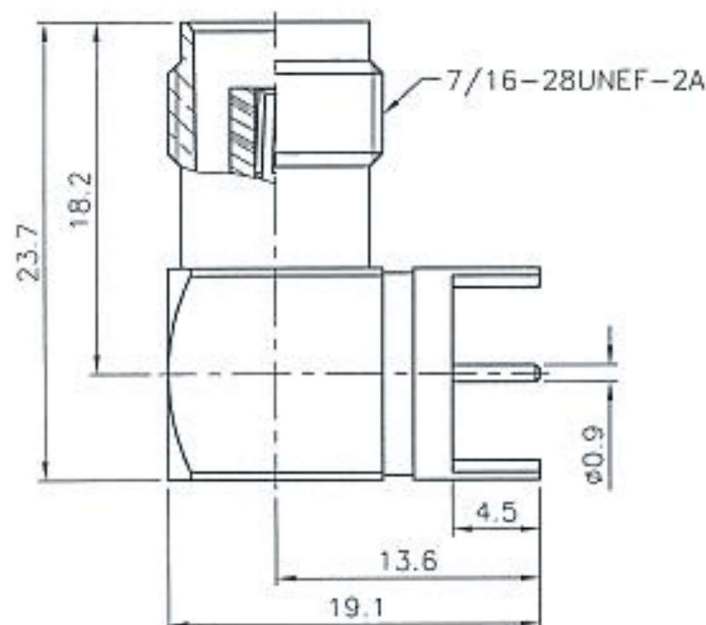


P.C.B. LAYOUT
(印刷電路板配置)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. PHOSPHOR BRONZE PER QQ-B-750
- △ 6. NICKEL PL 70 MIN THICK OVER COPPER STRIKE (吊電)



RoHS COMPLIANT

						DIMENSIONS ARE IN MILLIMETERS			PART NO.		 帛江科技股份有限公司 BO-JIANG TECHNOLOGY CO., LTD.	
LOCK RING	NOTE 1	NOTE 2				UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°			APPROVED	DATE		TITLE
INSULATOR	NOTE 4	WHITE								12/16/11		TNC R/A PCB MOUNT JACK
BODY	NOTE 1	NOTE 2								12/16/11		DRAWING NO. 7465NR502BF002B
INSULATOR	NOTE 4	WHITE										
CONTACT PIN	NOTE 5	NOTE 3										
CUBE BODY	NOTE 1	NOTE 6										
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	2.5/1	ISSUE	A2	DRAWN	DATE	FILE NO. Z:\NNO\7465\NR\502\002\7465NR502BF002B-A2

503F40414043434249444748