


ISS	SYMBOL	DESCRIPTION \ DATE
A1		由 R9102-11BGTG 轉來, 並更換中心針 \ 09/03/07'




REVISIONS

FOR CUSTOMER


REMARK: RoHS COMPLIANT
(符合 RoHS)

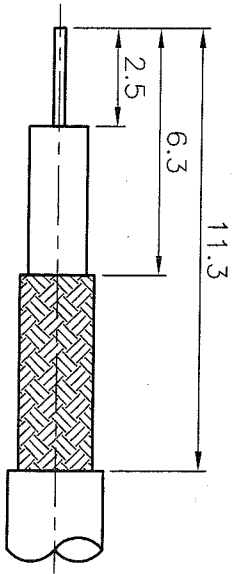

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

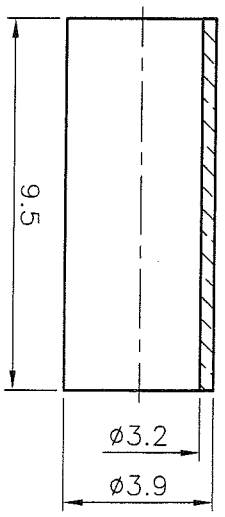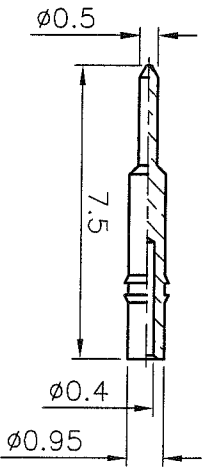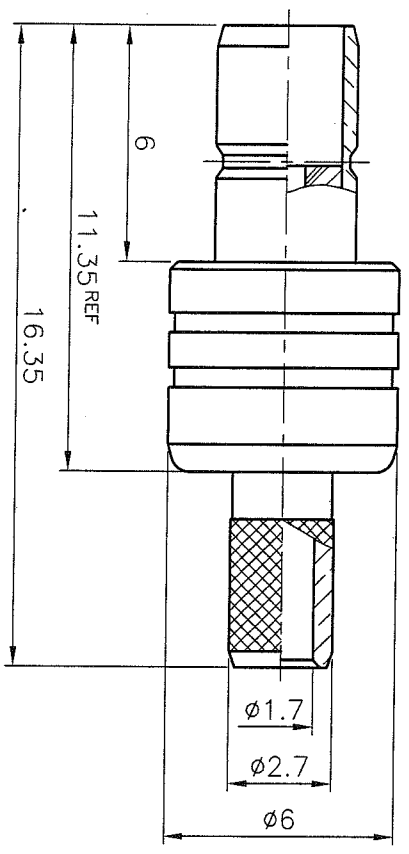

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 - GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468
 - BRASS JIS H 3250, C 2700
 - GOLD FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE



- CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
(套管壓著工具)
- CONTACT PIN TO SOLDER
(中心針銲接)

DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED (一般公差)		PART NO.	
TOLERANCES		APPROVED	DATE
0.5~6 = ±0.2	>6~30 = ±0.4	<i>[Signature]</i>	09/03/07'
>30~120 = ±0.6	>120~315 = ±1	CHECKED	DATE
>315~1000 = ±1.6	ANGLES(角度) = ±5°	<i>[Signature]</i>	09/03/07'
SCALE	5/1	ISSUE	A1
NO.	DESCRIPTION	MATERIAL	FINISH
	FERRULE	NOTE 5	NOTE 6
	CONTACT PIN	NOTE 1	NOTE 3
	INSULATOR	NOTE 4	WHITE
	BRAID HOLDER	NOTE 1	NOTE 2
	INSULATOR	NOTE 4	WHITE
	BODY	NOTE 1	NOTE 2
	DESCRIPTION	MATERIAL	FINISH
		Q'TY	DRAWING NO.
DRAWING NO. 9161NS711BD000B		TITLE	
BO-JIANG BO-JIANG TECHNOLOGY CO., LTD.		SMB CRIMP JACK (75 ohms) (FOR RG-179/U, 187A/U)	
DRAWING NO. 9161NS711BD000B		FILE NO. Z:\NND\9161\NS\711\000\9161NS711BD000B-A1	
DRAWN: <i>[Signature]</i>		DATE: 09/03/07'	
DRAWING NO. 9161NS711BD000B		DATE: 09/03/07'	

BO-JIANG 帛江科技股份有限公司